


## MHC Series - Professional Class Machinery Jack

MHC2.5/MHC5/MHC10/MHC15 Models -->



<--MHC25 Model

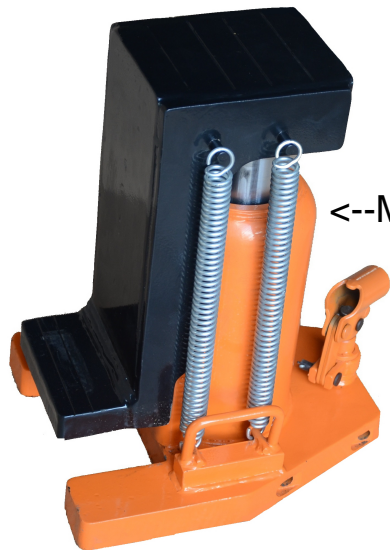

Model	Rated Capacity (TON)	Min. Toe Height (mm)	Lifting Stroke (mm)	Base Size(LXW) (mm)	Toe Size (LXW) mm	Overall Height (mm)	Net Weight (kg)
MHC-2.5	2.5	25	110	203×140	48 ×64	234	14
MHC-5	5	25	137	250×194	60 ×99	280	23
MHC-10	10	25	136	281×210	62 ×115	320	34
MHC-15	15	35	136	297×248	64 ×128	350	50
MHC-25	25	40	136	330×280	64 ×128	354	72

MHC is as series of heavy-duty, industrial quality, dual purpose hydraulic jacks.

Complies with ANSI/ASME B30.1 standards and CE safety standards.

Designed for lifting loads with very low minimum clearances (foot) or high clearances (head).

Ideal for house moving, machinery installation and application at shipyard, bridge building or plant construction sites.

Great companion tool for machinery type rollers.

Safety value for overload protection.

Features spring assisted return and over-travel

Ram is made of heart treated special steel to resist rust and assure strength.

Electrically welded base and cylinders to assure strength.

Not affected by temperature extremes.

Pump handle included.